



Yuasa Technisches Datenblatt

Yuasa 625SHD - Cargo Super Hochleistungsbatterien (SHD)

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	220Ah
Kaltstartstrom (A) EN1	1150A

Abmessungen

Länge	513mm
Breite	272mm
Höhe	242mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	57.2kg
Gewicht (trocken)	-
Säure Volumen	15.8 Liter



For Illustration Purposes Only

Gehäuseeigenschaften

Gehäusotyp	DIN C
Zellendarstellung	3
Batteriehälter	N
Ladezustandsanzeige	-
Tragegriffe	✓
Entgasung	-
Semi Traktionseigenschaften	-
Deckel Typ	Raised Plug


Technologie

Flammschutz	✓
Technologie	Sb/Ca
Separator	PE
VDA Überroll Test	-
Vibration	V2 (30Hz/6g/2hr)
Ladestrom	12A

Anschlusspol Typ


T1

Standard DIN Post

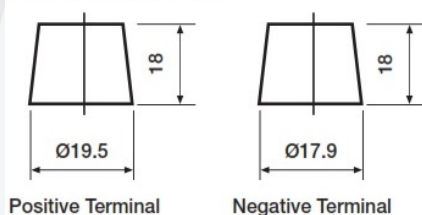

Positive Terminal

Negative Terminal

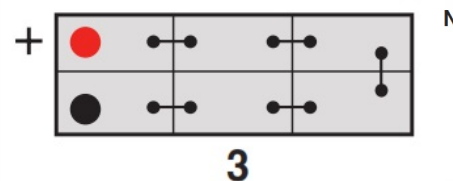

3

N



Batteriehälter

Ausstellungsdatum: 27/06/2017 - E&EO



Yuasa Technical Data Sheet

Yuasa 625SHD - Cargo Super Heavy Duty Batteries (SHD)

Performance

Voltage	12V
Capacity (20-hour)	220Ah
Cold Cranking Amps (EN1)	1150A

Dimensions

Length	513mm
Width	272mm
Height	242mm

Weights & Measures

Mean Weight with Acid	57.2kg
Dry Weight	-
Acid Volume	15.8 litres

Container Features

Case Type	DIN C
Cell Layout	3
Hold Down	N
State of Charge Indicator	-
Handles	✓
End Venting	-
Semi-Traction Features	-
Lid Type	Raised Plug



For Illustration Purposes Only


Technology

Flame Arrestor	✓
Technology	Sb/Ca
Separator	PE
VDA Roll Over Test	-
Vibration	V2 (30Hz/6g/2hr)
Recommended Charge Rate	12A

Terminal Type

T1


Standard DIN Post

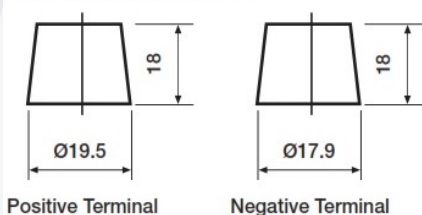

Positive Terminal

Negative Terminal

Cell Assembly Layout

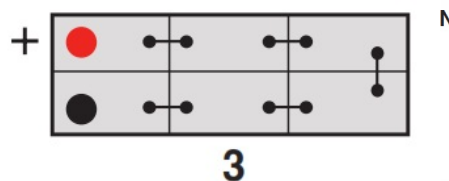

3

Battery Hold-down



Data Sheet generated on 27/06/2017 - E&OE