



Yuasa Technisches Datenblatt

Yuasa YBX3053 - YBX3000 SMF Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	45Ah
Kaltstartstrom (A) EN1	400A

Abmessungen

Länge	238mm
Breite	129mm
Höhe	223mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	11.4kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	JIS B24
Batteriehalter	N
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	3A


Anschlusspol Typ

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Zellenanordnung

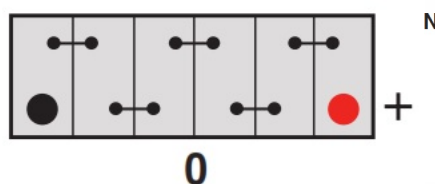

Batteriehalter



Ausstellungsdatum: 13/06/2017 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3053 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	400A

Dimensions

Length	238mm
Width	129mm
Height	223mm

Weights & Measures

Mean Weight with Acid	11.4kg
Dry Weight	-
Acid Volume	-

Container Features

Case Type	JIS B24
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid




Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

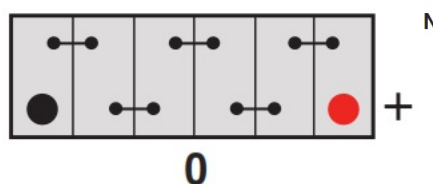

Battery Hold-down



Data Sheet generated on 13/06/2017 - E&OE