



Yuasa Technisches Datenblatt

Yuasa YBX3055 - YBX3000 SMF Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	36Ah
Kaltstartstrom (A) EN1	330A

Abmessungen

Länge	187mm
Breite	127mm
Höhe	223mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	9kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	JIS B19
Zellendarstellung	1
Batteriehälter	N
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	2A


Anschlusspol Typ

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Zellenanordnung

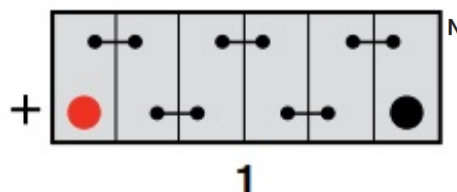

Batteriehälter



Ausstellungsdatum: 13/06/2017 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3055 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	36Ah
Cold Cranking Amps (EN1)	330A

Dimensions

Length	187mm
Width	127mm
Height	223mm

Weights & Measures

Mean Weight with Acid	9kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	JIS B19
Cell Layout	1
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	2A


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

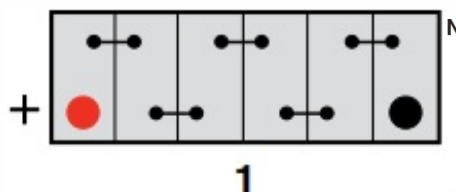

Battery Hold-down



Data Sheet generated on 13/06/2017 - E&OE