



## Yuasa Technisches Datenblatt

### Yuasa YBX3056 - YBX3000 SMF Batterien

#### Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	36Ah
Kaltstartstrom (A) EN1	330A

#### Abmessungen

Länge	187mm
Breite	137mm
Höhe	225mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	9kg
Gewicht (trocken)	-
Säure Volumen	-



#### Gehäuseeigenschaften

Gehäusotyp	JIS B19 + B1
Batteriehälter	B1
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF doppelwandige Deckelkonstruktion


#### Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	3A


#### Anschlusspol Typ

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3




#### Zellenanordnung

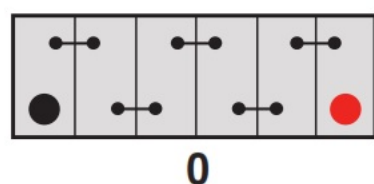

#### Batteriehälter

B1

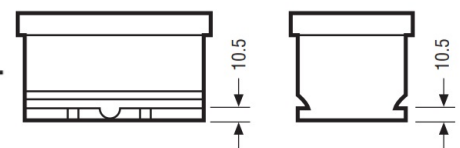

Ausstellungsdatum: 29/01/2018 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3056 - YBX3000 SMF Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	36Ah
Cold Cranking Amps (EN1)	330A

#### Dimensions

Length	187mm
Width	137mm
Height	225mm



#### Weights & Measures

Mean Weight with Acid	9kg
Dry Weight	-
Acid Volume	-

#### Container Features

Case Type	JIS B19 + B1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A


#### Terminal Type

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3




#### Cell Assembly Layout

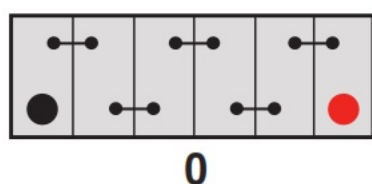

#### Battery Hold-down

B1

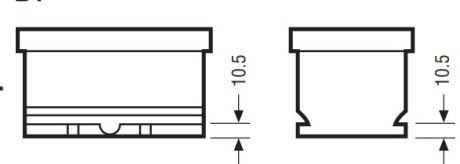

Data Sheet generated on 29/01/2018 - E&OE