



## Yuasa Technisches Datenblatt

### Yuasa YBX3057 - YBX3000 SMF Batterien

#### Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	45Ah
Kaltstartstrom (A) EN1	400A

#### Abmessungen

Länge	238mm
Breite	129mm
Höhe	223mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	11.4kg
Gewicht (trocken)	-
Säure Volumen	-



#### Gehäuseeigenschaften

Gehäusotyp	JIS B24
Zellendarstellung	1
Batteriehälter	N
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF doppelwandige Deckelkonstruktion


#### Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	3A


#### Anschlusspol Typ

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Zellenanordnung

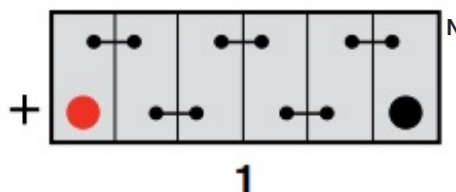

#### Batteriehälter



Ausstellungsdatum: 13/06/2017 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3057 - YBX3000 SMF Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	400A

#### Dimensions

Length	238mm
Width	129mm
Height	223mm

#### Weights & Measures

Mean Weight with Acid	11.4kg
Dry Weight	-
Acid Volume	-

#### Container Features

Case Type	JIS B24
Cell Layout	1
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid




#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A


#### Terminal Type

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Cell Assembly Layout

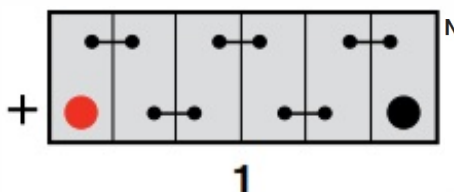

#### Battery Hold-down



Data Sheet generated on 13/06/2017 - E&OE