



Yuasa Technisches Datenblatt

Yuasa YBX3063 - YBX3000 SMF Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	45Ah
Kaltstartstrom (A) EN1	425A

Abmessungen

Länge	207mm
Breite	175mm
Höhe	175mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	11.5kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	LB1 DIN
Batteriehälter	B3/B4
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	3A


Anschlusspol Typ

T1

Standard DIN Post

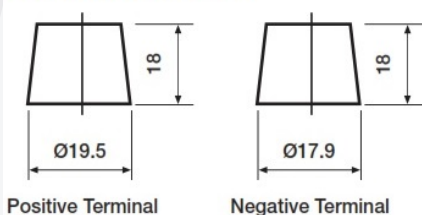


Zellenanordnung

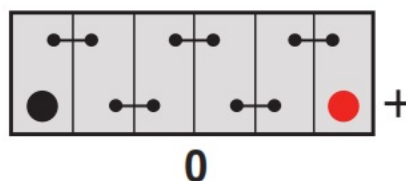

Batteriehälter

B3/B4 (B3 with Hold-Down adaptor)

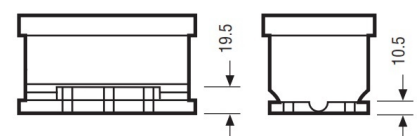

Ausstellungsdatum: 13/06/2017 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3063 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	425A

Dimensions

Length	207mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	11.5kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	LB1 DIN
Hold Down	B3/B4
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A

Terminal Type

T1


Standard DIN Post

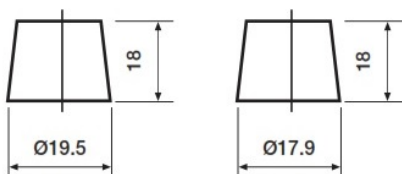

Positive Terminal


Negative Terminal

Cell Assembly Layout

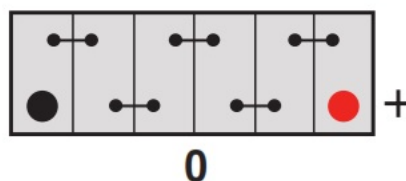

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

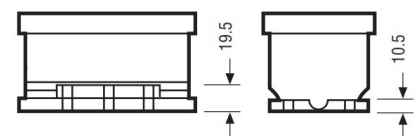

Data Sheet generated on 13/06/2017 - E&OE