



Yuasa Technisches Datenblatt

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	80Ah
Kaltstartstrom (A) EN1	800A

Abmessungen

Länge	317mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	21.9kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	L4 DIN AGM
Batteriehälter	B3
Ladezustandsanzeige	-
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckel Typ	VRLA

Technologie

Flammschutz	✓
Technologie	Ca/Ca VRLA
Separator	AGM
VDA Überroll Test	✓
Vibration	V3 (60Hz/6g/20hr)
Ladestrom	5A

Anschlusspol Typ

T1


Standard DIN Post



Positive Terminal

Negative Terminal


Zellenanordnung

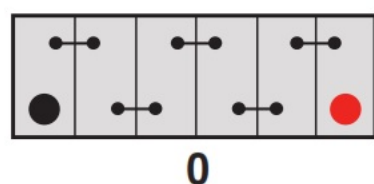

0

Batteriehälter

B3

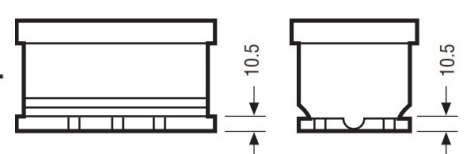

Ausstellungsdatum: 28/06/2017 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	80Ah
Cold Cranking Amps (EN1)	800A

Dimensions

Length	317mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	21.9kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	L4 DIN AGM
Hold Down	B3
State of Charge Indicator	-
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA

Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
VDA Roll Over Test	✓
Vibration	V3 (60Hz/6g/20hr)
Recommended Charge Rate	5A

Terminal Type

T1


Standard DIN Post




Positive Terminal

Negative Terminal

Cell Assembly Layout

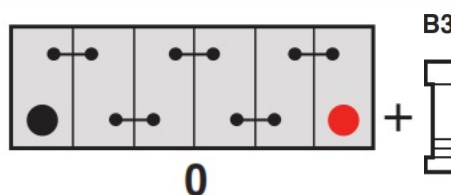

Battery Hold-down

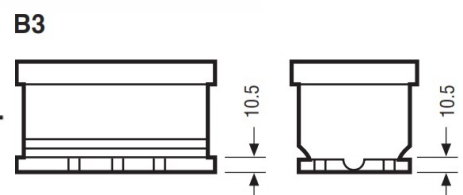

Data Sheet generated on 28/06/2017 - E&OE