



Yuasa Technisches Datenblatt

Yuasa YBX9020 - YBX9000 AGM Start Stop Plus Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	105Ah
Kaltstartstrom (A) EN1	950A

Abmessungen

Länge	393mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	29kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	L6 DIN AGM
Batteriehälter	B3
Ladezustandsanzeige	-
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckel Typ	VRLA

Technologie

Flammschutz	✓
Technologie	Ca/Ca VRLA
Separator	AGM
VDA Überroll Test	✓
Vibration	V3 (60Hz/6g/20hr)
Ladestrom	6A

Anschlusspol Typ

T1


Standard DIN Post



Positive Terminal

Negative Terminal


Zellenanordnung

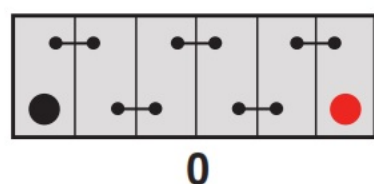

0

Batteriehälter

B3

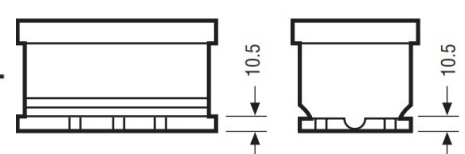

Ausstellungsdatum: 28/06/2017 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX9020 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	105Ah
Cold Cranking Amps (EN1)	950A

Dimensions

Length	393mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	29kg
Dry Weight	-
Acid Volume	-

Container Features

Case Type	L6 DIN AGM
Hold Down	B3
State of Charge Indicator	-
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA

Technology


Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Vibration	✓
Recommended Charge Rate	V3 (60Hz/6g/20hr) 6A



Terminal Type

T1


Standard DIN Post

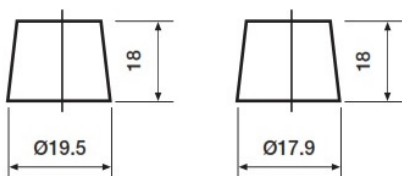


Positive Terminal

Negative Terminal

Cell Assembly Layout

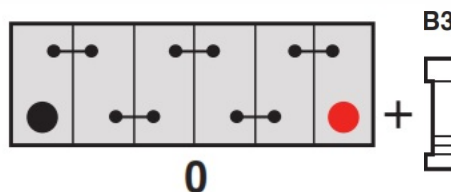

Battery Hold-down

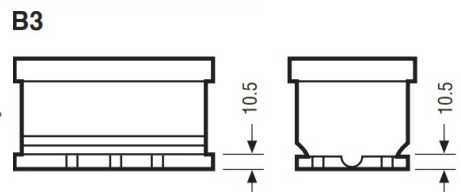

Data Sheet generated on 28/06/2017 - E&OE